

1: GLAZING MATERIAL

- |   |                          |
|---|--------------------------|
| INNER                                       | OUTER                    |
| ACRYLIC DOME <input type="checkbox"/>       | <input type="checkbox"/> |
| POLYCARBONATE DOME <input type="checkbox"/> | <input type="checkbox"/> |

2: GLAZING COLOR

- |                                 |                              |
|---------------------------------|------------------------------|
| CLEAR <input type="checkbox"/>  | <input type="checkbox"/>     |
| BRONZE <input type="checkbox"/> | N/A <input type="checkbox"/> |
| WHITE <input type="checkbox"/>  | <input type="checkbox"/>     |
| OTHER _____                     | <input type="checkbox"/>     |

3: FRAME FINISH


- |  |                          |
|--|--------------------------|
| MILL <input type="checkbox"/>            | <input type="checkbox"/> |
| BRONZE ANODIZED <input type="checkbox"/> | <input type="checkbox"/> |
| CLEAR ANODIZED <input type="checkbox"/>  | <input type="checkbox"/> |
| CUSTOM COLOR _____                       | <input type="checkbox"/> |

4: PYRAMID PITCH (OPTIONAL)

- |   |
|---|
| 22 DEGREE (1/2 WIDTH X .414) <input type="checkbox"/> |
| 30 DEGREE (1/2 WIDTH X .577) <input type="checkbox"/> |
| 40 DEGREE (1/2 WIDTH X .839) <input type="checkbox"/> |

FOR SELF FLASHING SKYLIGHTS PROVIDE  
ROUGH OPENING OR ID OF SKYLIGHT DIMENSION

- |            |              |   |
|------------|--------------|---|
| QTY: _____ | R.O. = _____ | X |
| QTY: _____ | R.O. = _____ | X |
| QTY: _____ | R.O. = _____ | X |
| QTY: _____ | R.O. = _____ | X |

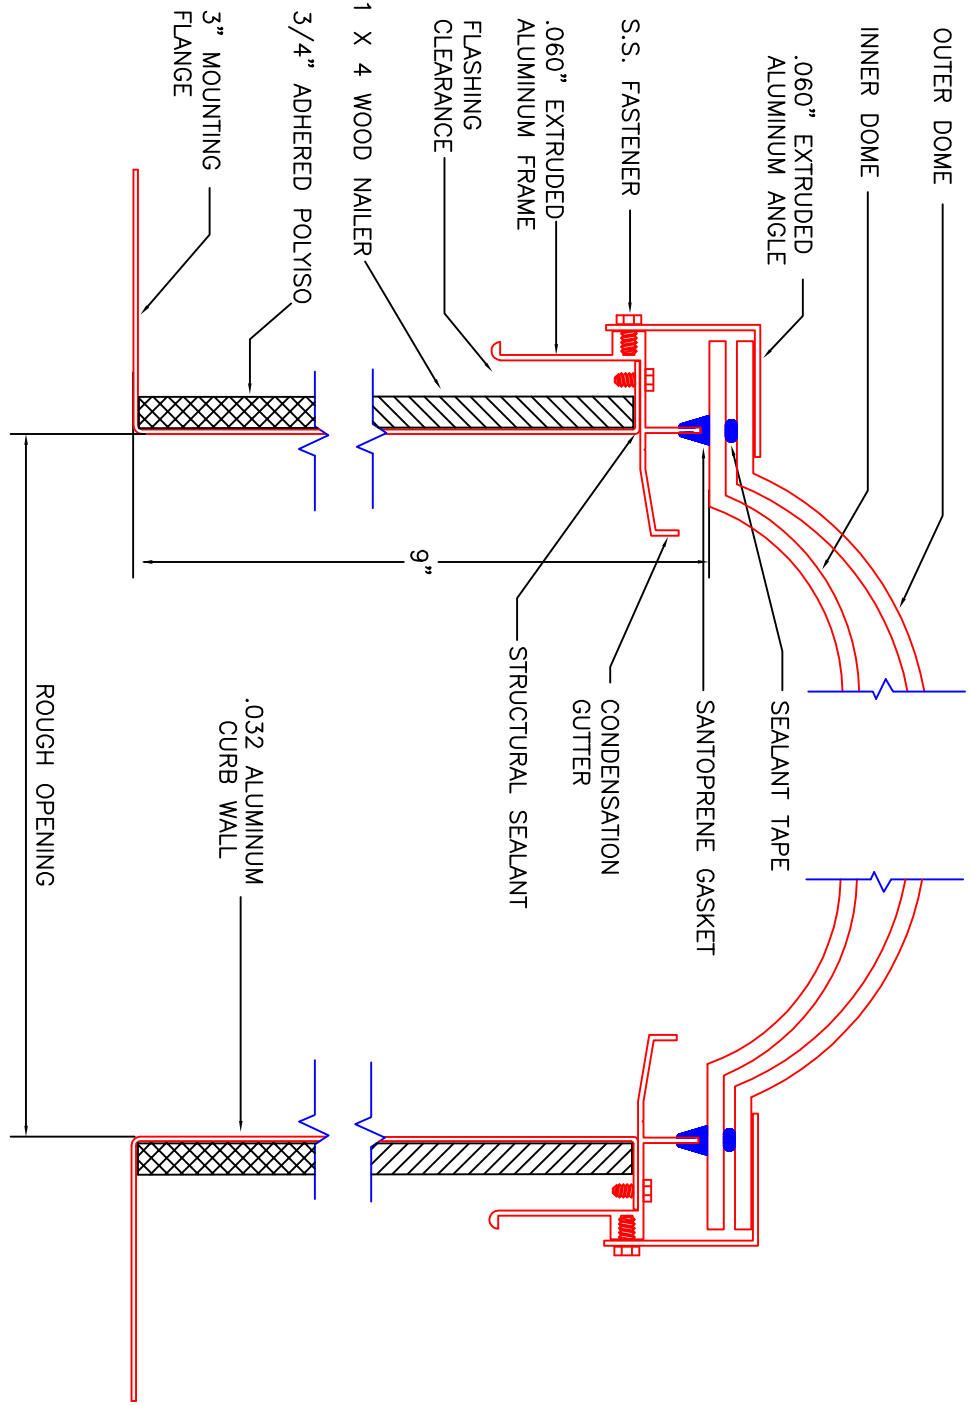

9" EZISF INSULATED SELF FLASHING



**AMERICAN SKYLITES**  
 525 113th STREET ARLINGTON, TEXAS 76011  
 Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS		
TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331 UNIFORM LOAD ASTM E330	TEST PRESSURE POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	NO LEAKAGE 60.0 PSF MIN 40.0 PSF MIN