

1: GLAZING MATERIAL

INNER OUTER

ACRYLIC DOME

POLYCARBONATE DOME

2: GLAZING COLOR

CLEAR

BRONZE N/A

WHITE

OTHER _____

3: FRAME FINISH

MILL

BRONZE ANODIZED

CLEAR ANODIZED

CUSTOM COLOR _____

4: PYRAMID PITCH (OPTIONAL)

22 DEGREE (1/2 WIDTH X .414)

30 DEGREE (1/2 WIDTH X .577)

40 DEGREE (1/2 WIDTH X .839)

FOR SELF FLASHING SKYLIGHTS PROVIDE
ROUGH OPENING OR ID OF SKYLIGHT DIMENSION

QTY: R.O. = X


QTY: R.O. = X

QTY: R.O. = X

QTY: R.O. = X

QTY: R.O. = X

QTY: R.O. = X

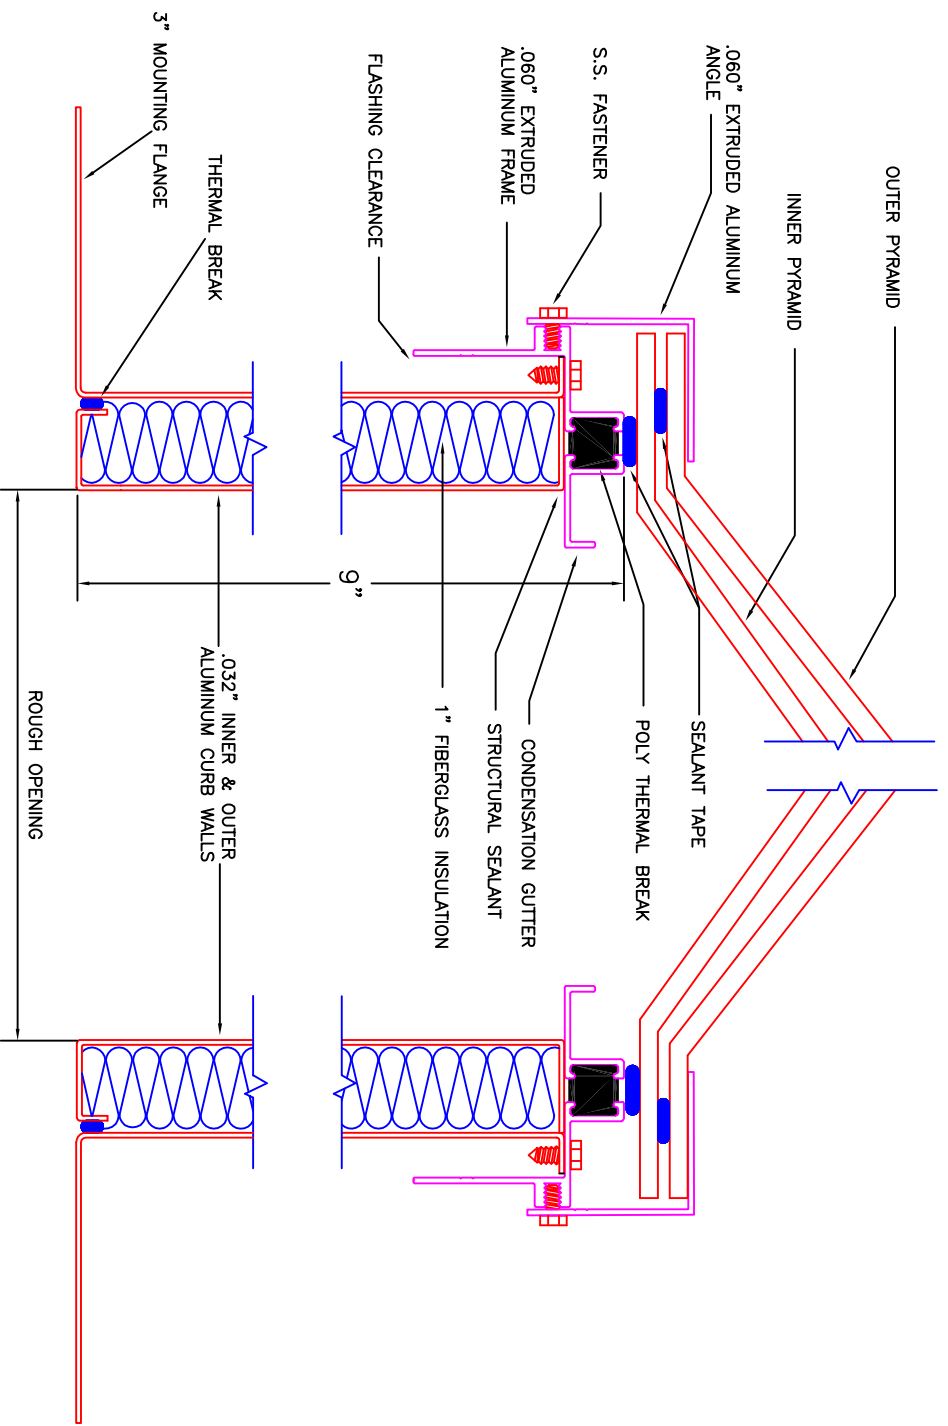

9" THERMALLY BROKEN & INSULATED SELF FLASHING - PYRAMID



AMERICAN SKYLITES
525 113th STREET ARLINGTON, TEXAS 76011
Phone 800.772.7401 Fax 800.445.7282

TEST METHOD		SPECIFICATIONS	
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	TEST PRESSURE	ALLOWED
WATER PENETRATION ASTM E547/E331	POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	TEST PRESSURE 15.0 PSF	NO LEAKAGE
UNIFORM LOAD ASTM E330			60.0 PSF MIN 40.0 PSF MIN