

1: GLAZING MATERIAL

- TEMPERED  INNER OUTER
- LAMINATED
- TEMPERED & LAMINATED
- OVERALL THICKNESS  3/4"  1"
- OTHER \_\_\_\_\_

2: GLAZING COLOR

- CLEAR
- BRONZE  N/A
- GRAY  N/A
- OTHER \_\_\_\_\_

3: FRAME FINISH

- MILL
- BRONZE ANODIZED
- CLEAR ANODIZED
- CUSTOM COLOR \_\_\_\_\_

GLASS RIDGE MOUNT

RO=DIM#1: FROM CURB WALL TO  $\phi$  RIDGE  
 DIM#2: FROM  $\phi$  RIDGE TO CURB WALL  
 DIM#3: OVERALL LENGTH/RUN OF UNIT

RO = X X X

# BAYS = \_\_\_\_\_

ROOF PITCH = \_\_\_\_\_

\*RIDGE MOUNT MAY REQUIRE PARTIAL FIELD ASSEMBLY.

\*4" OR 6" SELF FLASHING FRAME AVAILABLE.


\*NOTE DIMENSIONS ABOVE AND/OR ON DRAWING.

\*NOTE # OF BAYS ABOVE.

\*ROOF PITCH REQUIRED.

\*ALL SKYLIGHT FASTENERS STAINLESS STEEL.

\*ALL FRAMING, FLASHING & FASTENERS ARE SUPPLIED BY OTHERS.

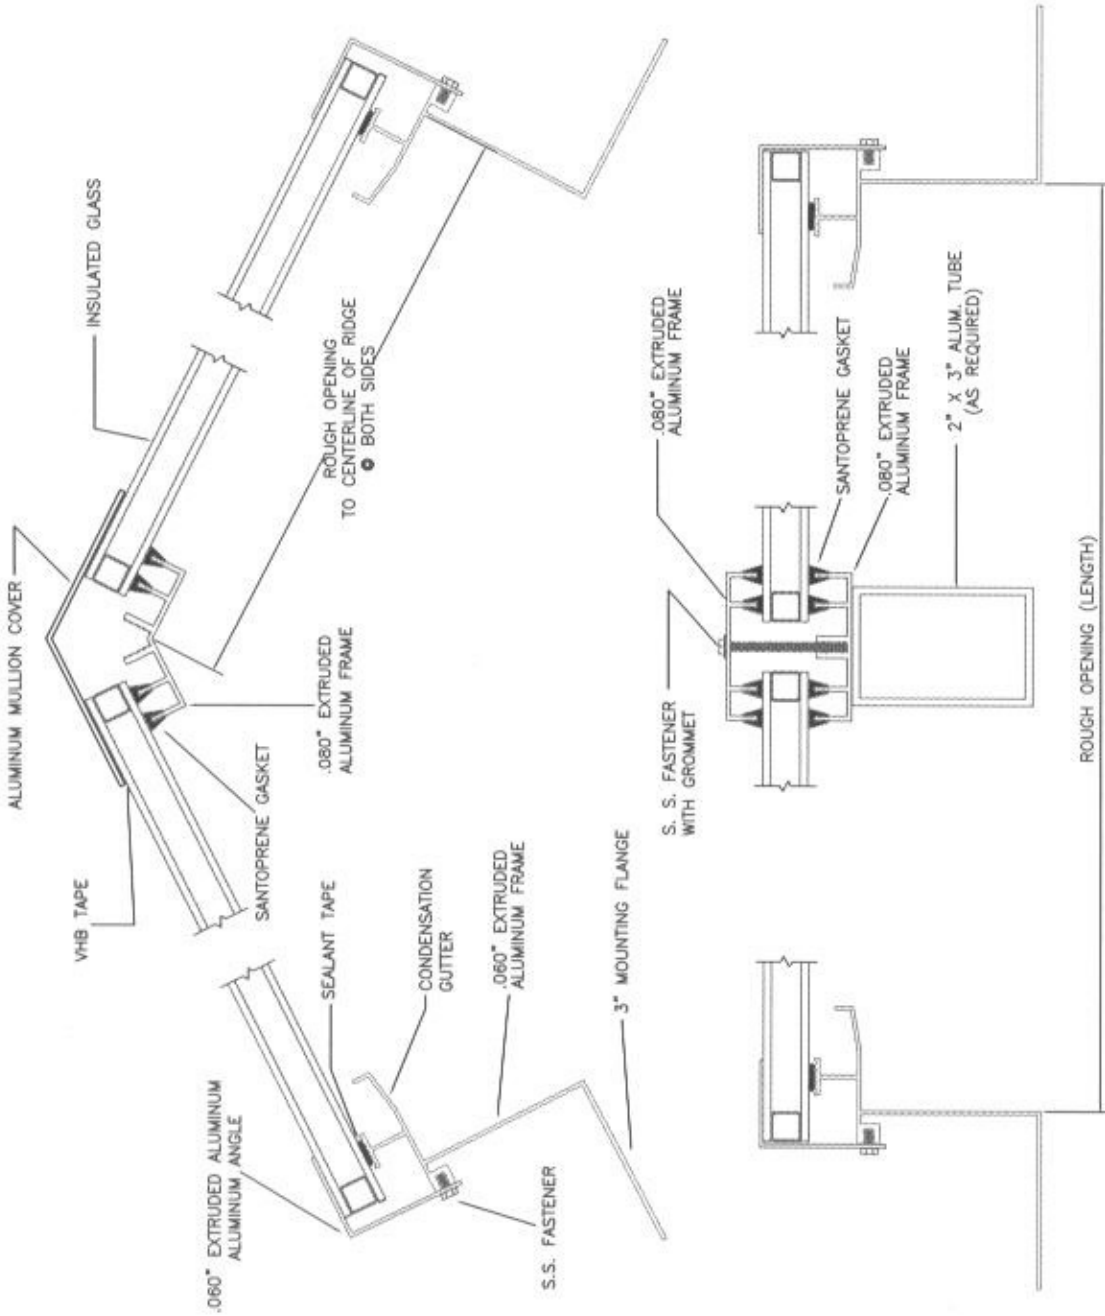

**AMERICAN SKYLITES**

525 113th STREET ARLINGTON, TEXAS 76011  
 Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS

| TEST                                | TEST PRESSURE                          | ALLOWED                      |
|-------------------------------------|--|------------------------------|
| AIR INFILTRATION<br>ASTM E283       | 6.24 PSF (50 MPH)                      | 0.03 CFM/FT                  |
| WATER PENETRATION<br>ASTM E547/E331 | TEST PRESSURE<br>15.0 PSF              | NO LEAKAGE                   |
| UNIFORM LOAD<br>ASTM E530           | POSITIVE 69.0 PSF<br>NEGATIVE 75.0 PSF | 60.0 PSF MIN<br>40.0 PSF MIN |