

1: GLAZING MATERIAL

- | | | | | | |
|-------------------------|--------------------------|-------|--------------------------|-------|--------------------------|
| TEMPERED | <input type="checkbox"/> | INNER | <input type="checkbox"/> | OUTER | <input type="checkbox"/> |
| LAMINATED | <input type="checkbox"/> | | <input type="checkbox"/> | | <input type="checkbox"/> |
| TEMPERED & LAMINATED | <input type="checkbox"/> | | <input type="checkbox"/> | | <input type="checkbox"/> |
| OVERALL GLASS THICKNESS | | 3/4" | <input type="checkbox"/> | | <input type="checkbox"/> |
| | | 1" | <input type="checkbox"/> | | <input type="checkbox"/> |

OTHER _____

2: GLAZING COLOR


- | | | | |
|-----------|--------------------------|-----|--------------------------|
| CLEAR | <input type="checkbox"/> | N/A | <input type="checkbox"/> |
| BRONZE | <input type="checkbox"/> | | <input type="checkbox"/> |
| LOW "E" | <input type="checkbox"/> | | <input type="checkbox"/> |
| ARGON GAS | | | <input type="checkbox"/> |

3: FRAME FINISH

- | | | |
|--------------------|--|--------------------------|
| MILL | | <input type="checkbox"/> |
| BRONZE ANODIZED | | <input type="checkbox"/> |
| CLEAR ANODIZED | | <input type="checkbox"/> |
| CUSTOM COLOR _____ | | <input type="checkbox"/> |

FOR CURB MOUNT SKYLIGHTS PROVIDE
OUTSIDE DIMENSION OF FINISHED CURB

- | | | |
|------|------------|---|
| QTY: | O.D. CURB= | X |
| QTY: | O.D. CURB= | X |
| QTY: | O.D. CURB= | X |
| QTY: | O.D. CURB= | X |
| QTY: | O.D. CURB= | X |

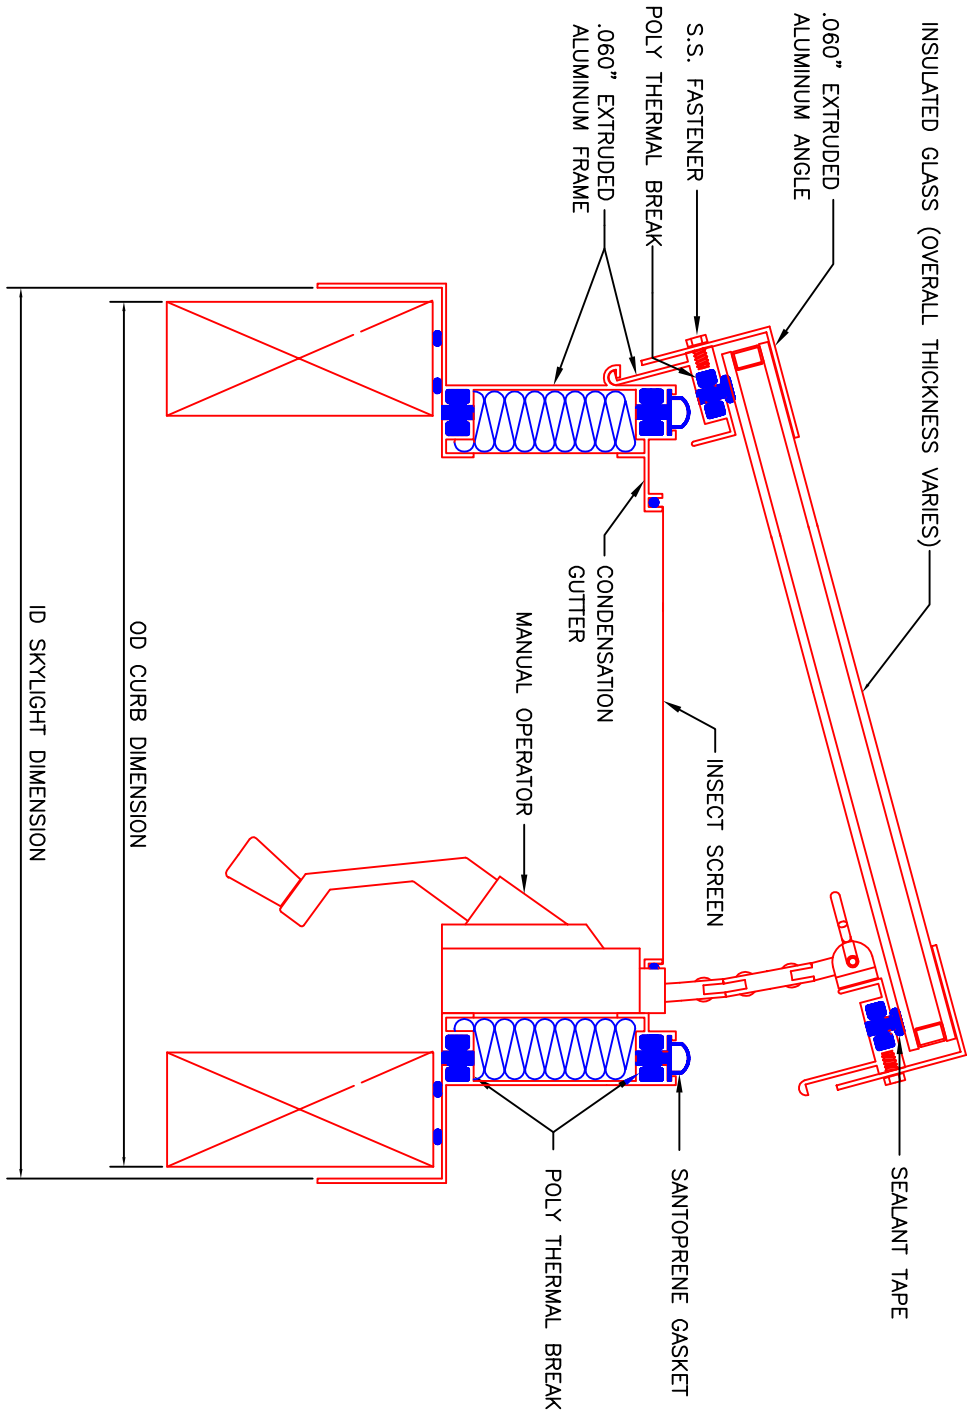

GLASS THERMALLY BROKEN & INSULATED VENTING CURB MOUNT

SPECIFICATIONS

| TEST METHOD | TEST PRESSURE | ALLOWED |
|--|---|--|
| AIR INFILTRATION ASTM E283 | 6.24 PSF (50 MPH) | 0.03 CFM/FT |
| WATER PENETRATION ASTM E547/E331 UNIFORM LOAD ASTM E330 | TEST PRESSURE 15.0 PSF POSITIVE 69.0 PSF NEGATIVE 75.0 PSF | NO LEAKAGE 60.0 PSF MIN 40.0 PSF MIN |



AMERICAN SKYLITES

525 113th STREET ARLINGTON, TEXAS 76011
Phone 800.772.7401 Fax 800.445.7282