

1: GLAZING MATERIAL

INNER  OUTER

POLYCARBONATE DOME

2: GLAZING COLOR

- CLEAR
- BRONZE  N/A
- WHITE
- OTHER

3: FRAME FINISH

- MILL
- BRONZE ANODIZED
- CLEAR ANODIZED
- CUSTOM COLOR

4: PYRAMID PITCH (OPTIONAL)

- 22 DEGREE (1/2 WIDTH X .414)
- 30 DEGREE (1/2 WIDTH X .577)
- 40 DEGREE (1/2 WIDTH X .839)

FOR CURB MOUNT SKYLIGHTS PROVIDE  
OUTSIDE DIMENSION OF FINISHED CURB


QTY: 0.D. CURB= X

QTY: 0.D. CURB= X

QTY: 0.D. CURB= X

QTY: 0.D. CURB= X

QTY: 0.D. CURB= X

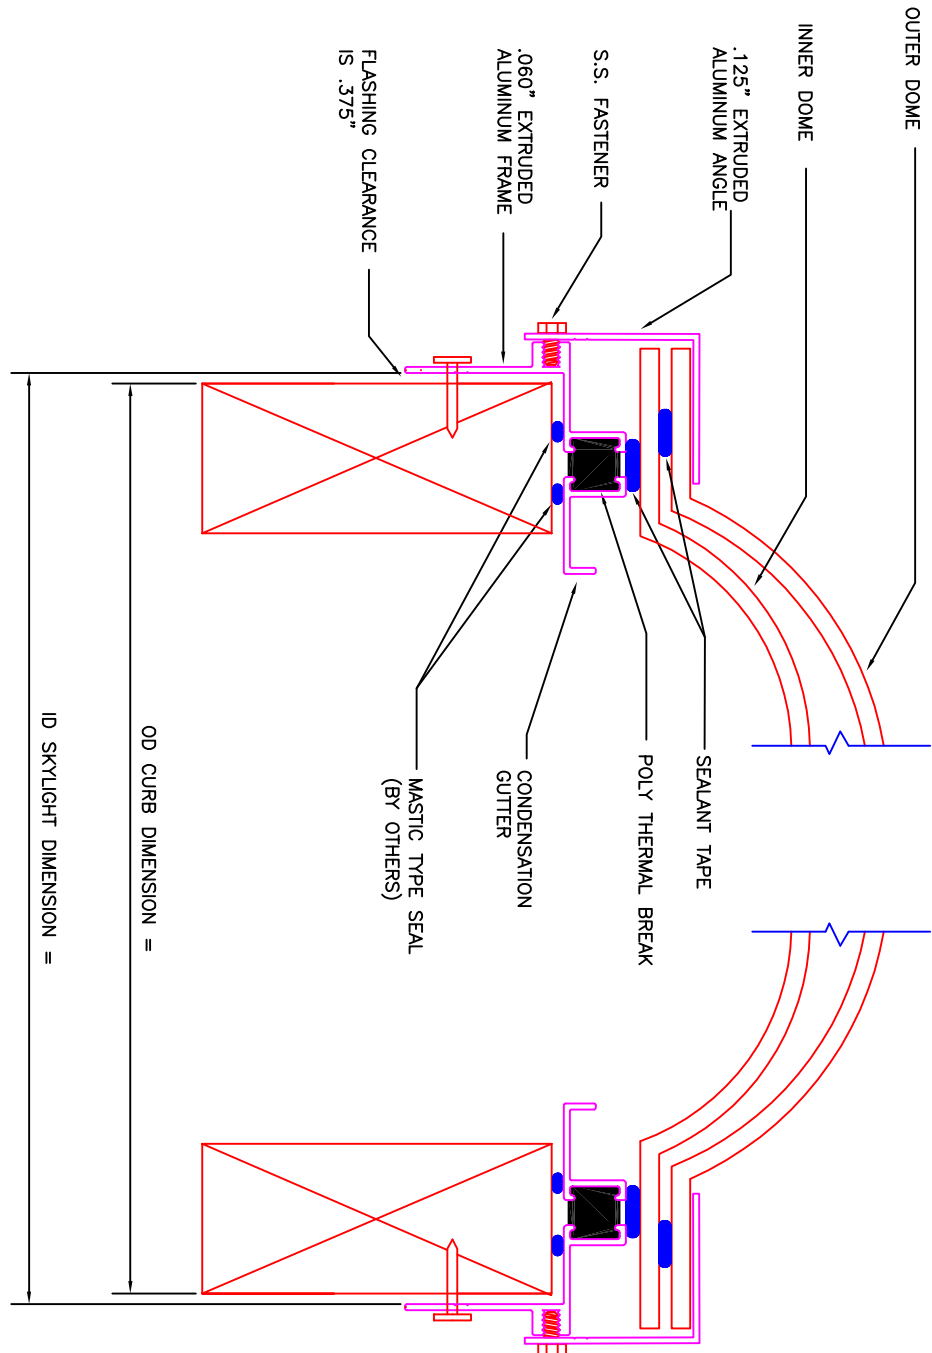

FALL PROTECTION THERMALLY BROKEN CURB MOUNT



**AMERICAN SKYLITES**

525 113th STREET ARLINGTON, TEXAS 76011  
Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS		
TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331	TEST PRESSURE 15.0 PSF	NO LEAKAGE
UNIFORM LOAD IMPACT OSHA SPECIFICATIONS	POSITIVE 1200 ft/lbs	NO FAILURE MEETS MIN 775 ft/lbs