

1: GLAZING MATERIAL

INNER OUTER

POLYCARBONATE DOME

2: GLAZING COLOR

CLEAR
 BRONZE N/A
 WHITE
 OTHER

3: FRAME FINISH


MILL
 BRONZE ANODIZED
 CLEAR ANODIZED
 CUSTOM COLOR

4: PYRAMID PITCH (OPTIONAL)

22 DEGREE (1/2 WIDTH X .414)
 30 DEGREE (1/2 WIDTH X .577)

FOR CURB MOUNT SKYLIGHTS PROVIDE
 OUTSIDE DIMENSION OF FINISHED CURB

QTY: 0.D. CURB= X
 QTY: 0.D. CURB= X
 QTY: 0.D. CURB= X
 QTY: 0.D. CURB= X
 QTY: 0.D. CURB= X

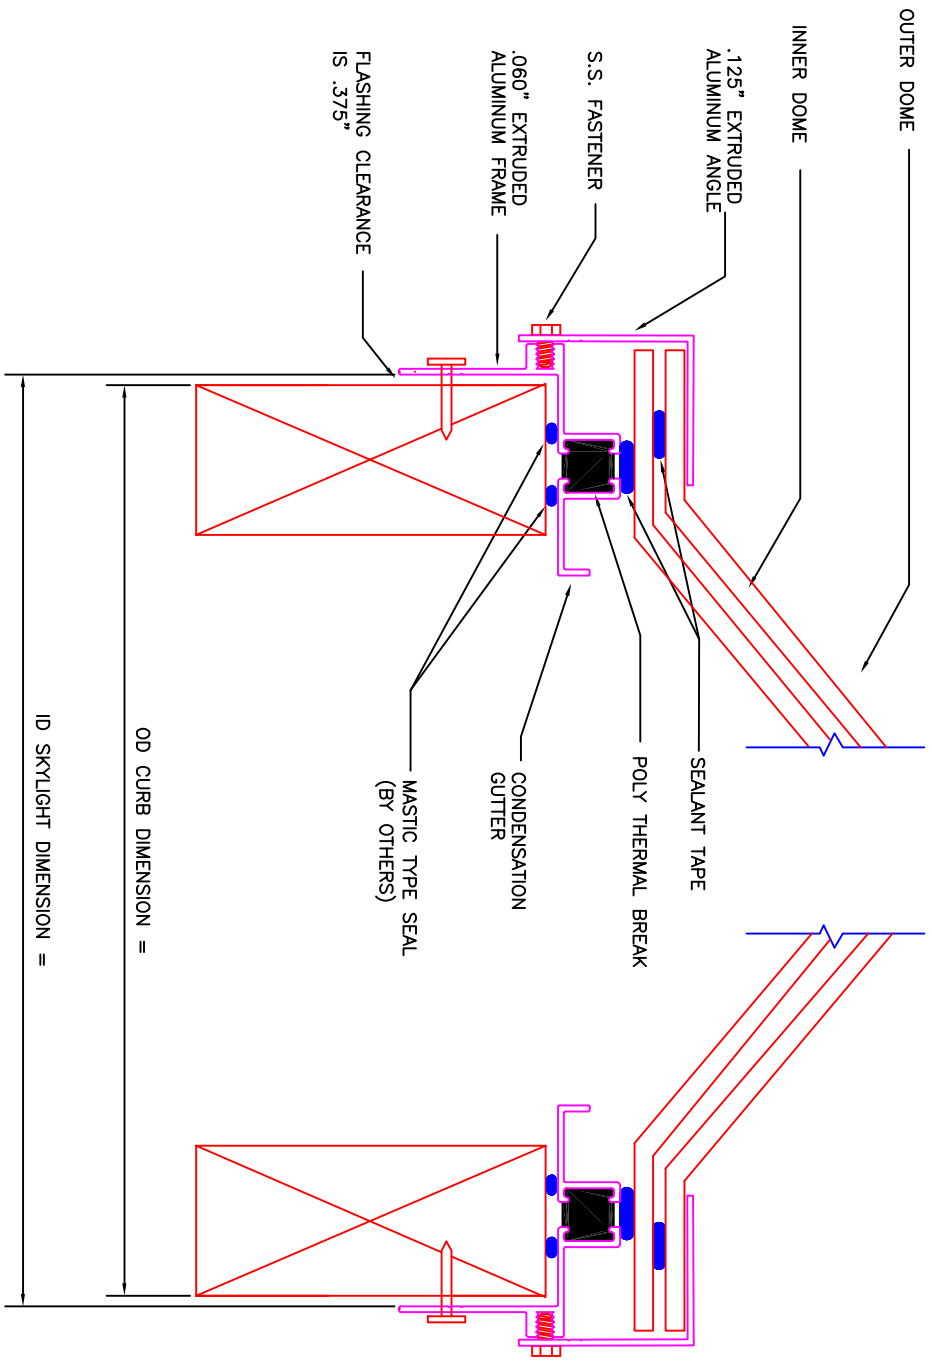

FALL PROTECTION CURB MOUNT



AMERICAN SKYLITES

525 113th STREET ARLINGTON, TEXAS 76011
 Phone 800.772.7401 Fax 800.445.7282

| SPECIFICATIONS | | |
|--|---------------------------|--|
| TEST METHOD | TEST PRESSURE | ALLOWED |
| AIR INFILTRATION ASTM E283 | 6.24 PSF (50 MPH) | 0.03 CFM/FT |
| WATER PENETRATION ASTM E547/E531 | TEST PRESSURE 15.0 PSF | NO LEAKAGE |
| UNIFORM LOAD IMPACT OSHA SPECIFICATIONS | POSITIVE 1000 ft./lbs | NO FAILURE MEETS MIN 775 ft./lbs |