

1: GLAZING MATERIAL

- |                    |                          |       |                          |       |                          |
|--------------------|--------------------------|-------|--------------------------|-------|--------------------------|
| ACRYLIC DOME       | <input type="checkbox"/> | INNER | <input type="checkbox"/> | OUTER | <input type="checkbox"/> |
| POLYCARBONATE DOME | <input type="checkbox"/> |       |                          |       | <input type="checkbox"/> |

2: GLAZING COLOR

- |        |                          |                          |
|--------|--------------------------|--------------------------|
| CLEAR  | <input type="checkbox"/> | <input type="checkbox"/> |
| BRONZE | <input type="checkbox"/> | N/A                      |
| WHITE  | <input type="checkbox"/> | <input type="checkbox"/> |
| OTHER  | <input type="checkbox"/> | <input type="checkbox"/> |

3: FRAME FINISH


- |                 |                          |
|-----------------|--------------------------|
| MILL            | <input type="checkbox"/> |
| BRONZE ANODIZED | <input type="checkbox"/> |
| CLEAR ANODIZED  | <input type="checkbox"/> |
| CUSTOM COLOR    | <input type="checkbox"/> |

4: PYRAMID PITCH (OPTIONAL)

- |                              |                          |
|------------------------------|--------------------------|
| 22 DEGREE (1/2 WIDTH X .414) | <input type="checkbox"/> |
| 30 DEGREE (1/2 WIDTH X .577) | <input type="checkbox"/> |
| 40 DEGREE (1/2 WIDTH X .839) | <input type="checkbox"/> |

FOR CURB MOUNT SKYLIGHTS PROVIDE  
OUTSIDE DIMENSION OF FINISHED CURB

- |                 |   |
|-----------------|---|
| QTY: 0.D. CURB= | X |
| QTY: 0.D. CURB= | X |
| QTY: 0.D. CURB= | X |
| QTY: 0.D. CURB= | X |
| QTY: 0.D. CURB= | X |

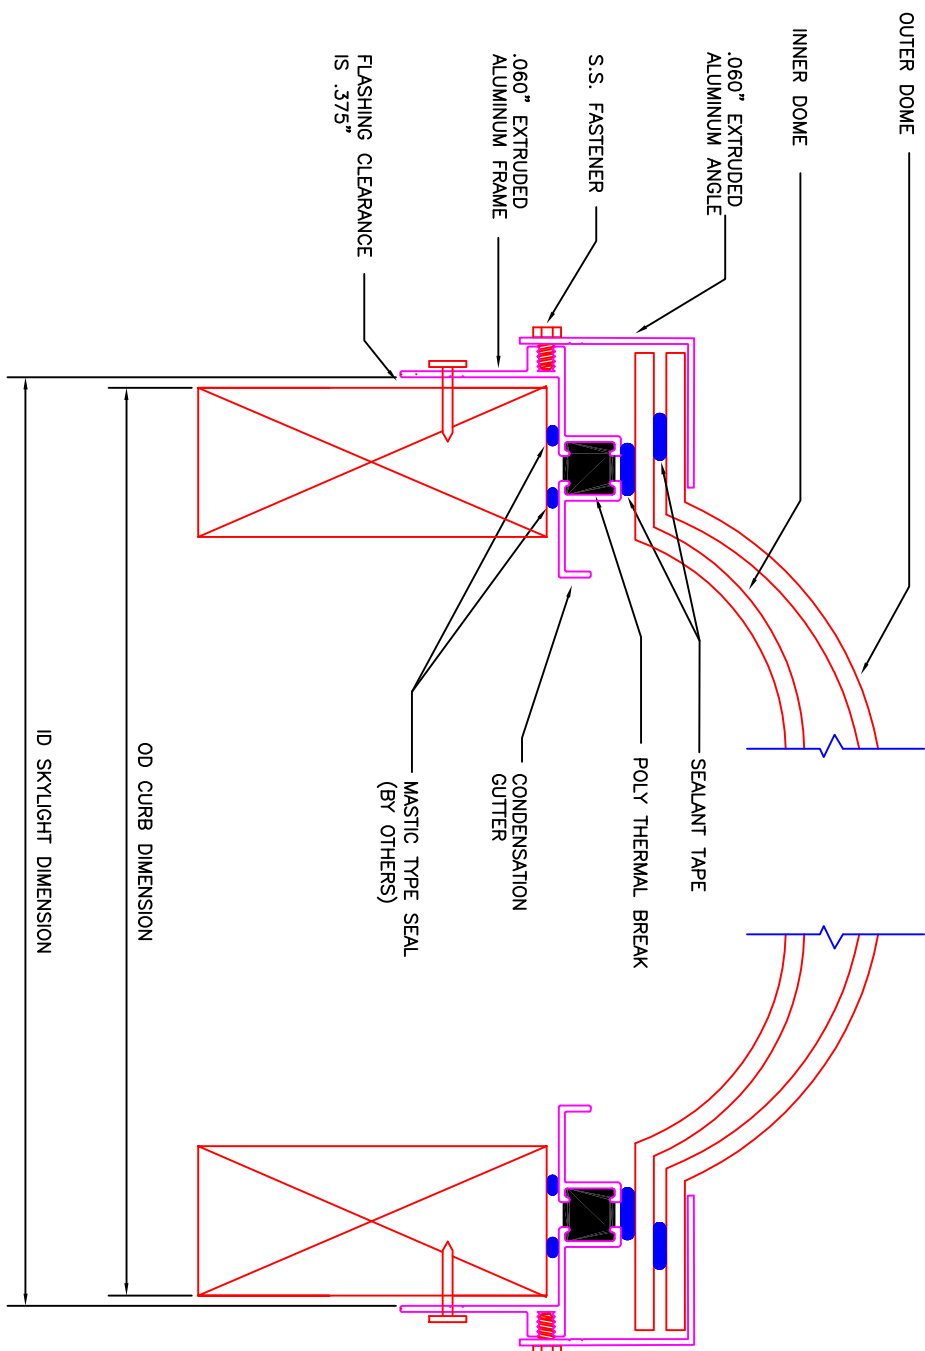

THERMALLY BROKEN CURB MOUNT



AMERICAN SKYLITES

525 113th STREET ARLINGTON, TEXAS 76011  
Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS

TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E531	TEST PRESSURE 15.0 PSF	NO LEAKAGE
UNIFORM LOAD ASTM E330	POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	60.0 PSF MIN 40.0 PSF MIN